



RYK M185 SEQUENCER


BILL OF MATERIALS AND COMPONENT POSITIONS FOR E-PANEL PCB V3.774

IMPORTANT !

Please check the version number of your PCB matches that of this document.

Please make sure you follow the build instructions carefully, the order of construction is critical on this PCB.

M185 E-Panel PCB V3.774 component positions

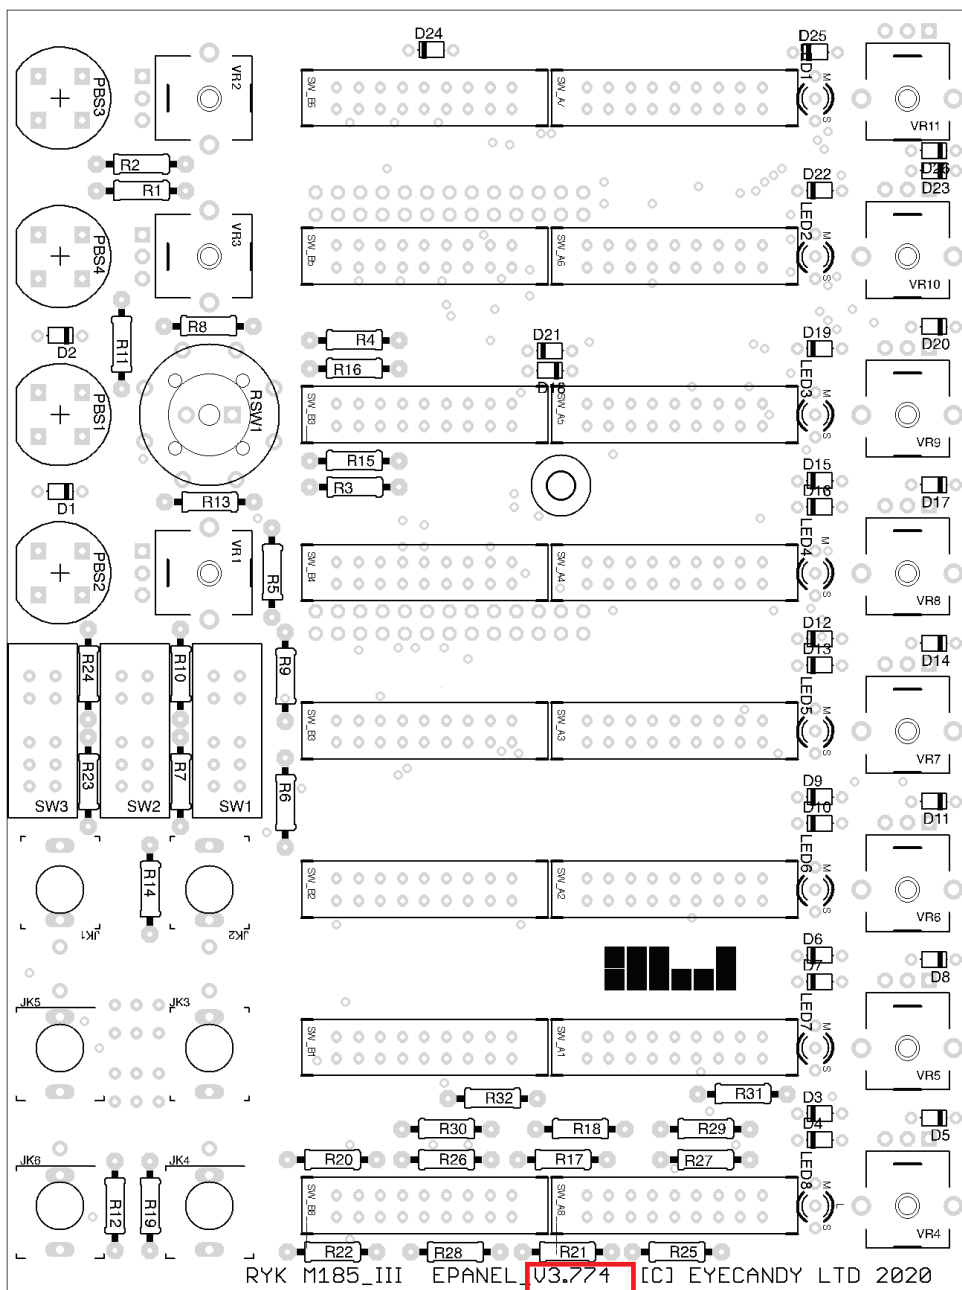

M185 E-Panel PCB BOM

1N4148		D1-D26
2k2		R1
1k		R2
220k		R3,R5,R9,R10,R14,R15,R17, R19,R24,R29,R30
33k		R4,R18,R20
100k		R6,R7,R13,R23,R27,R28
47k		R8,R21,R22
68k		R11,R25,R26
220r		R12
470k		R16,R31,R32

Black jack socket JK1,JK2,JK3

Green jack socket JK4,JK5,JK6

3mm LED R/G LED1-LED8

Blue push switch PBS1,PBS2

Grey push switch PBS3

Red push switch PBS4

Rotary 8-way switch RSW1

2x13 Pin female header SV1,SV2

4-way slide switch SW1-SW3

Micro 2-way switch SW4,SW5

8-way slide switch SW_A1-A8

8-way slide switch SW_B1-B8

50k Potentiometer marked 503 VR1,VR2,VR4,VR5,VR6,VR7,
VR8,VR9,VR10,VR11

1M Potentiometer marked 105 VR3